

Wastewater System Master Plan CIP

City Project: CS03-01 - North Lawrence Pump Station Improvements

Master Plan Project: NL_PS

Status: In Design

Project Type: Collections System Improvement Projects

Engineering: 2 Qtr. 2005

Construction: 3 Qtr. 2005

Master Plan: \$0


Updated Plan: \$ 2020097 Encumbered: \$310093

Completion: 2 Qtr. 2006

Master plan projects PS01, PS02, PS03 and PS 03 FM moved from 2025 to 2003. Bartlett & West are currently working on the design to replace these three North Lawrence Canned Pump Stations with the city standard submersible pump stations. Increase PS capacity as follows: PS01 from 0.29 MGD to 2.0 MGD; PS02 from 0.29 MGD to 0.5 MGD; PS03 from 0.86 MGD to 3.0 MGD, and PS03 Force Main replace existing 8" with new 12" force main.



Project Area

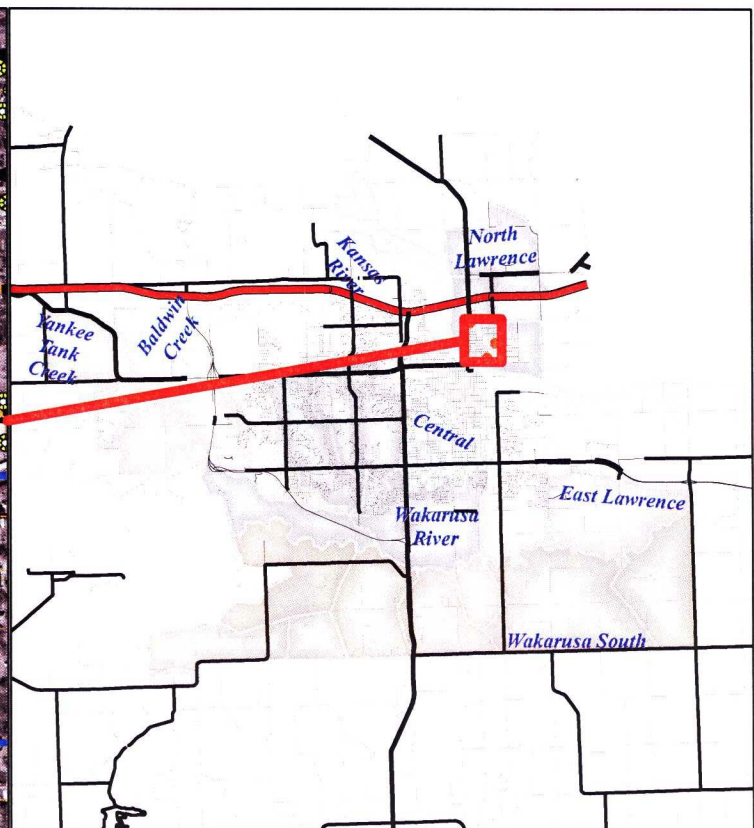

Project Location